

**PNEUMATIC, HYDRAULIC, HIGH PRESSURE
HYDRAULIC & GENERAL PURPOSE COUPLINGS**

PNEUMATIK, MITTELDRUCK-HYDRAULIK,
HOCHDRUCK-HYDRAULIK UND FLÜSSIGKEITEN.

SERIE 215-16



HIGH PRESSURE SERIES HP
HOCHDRUCK SERIE HP



Couplers and Plugs
Kupplungen und Nippel

Connection Anschlüsse	Order No Bestellnr.	SW	L	LI	ØD
--------------------------	------------------------	----	---	----	----

Interchangeability - Kompatibilität
WALTHER HP - 016

Temperature Range Temperaturbereich
-20°C +100°C (-4°F +212°F)

Working Pressure - Betriebsdruck
500 bar (7250 PSI) Steel - Stahl
250 bar (3625 PSI) 316L St. Steel -316L Edelstahl

Flow capacity - Größen
NW - 16 mm (200 mm²)

For optional orders please add the symbol
of your option end of the order no.
Optionsbestellungen
Kennbuchstabe bitte hinzufügen
(Beispiel: 215.16 EGB 26-K-V)

Material - Material

Coupler body -
Kupplungsgrundkörper :Steel & Zinc Plated -
Stahl Verzinkt

Back Part -
Rückwartiger :Steel Zinc Plated -
Stahl Verzinkt

Sleeve - Hülse :Steel Zinc Plated -
Stahl Verzinkt

Valve - Ventil :Brass - Messing

Springs & Ring-
Federn & Ring :Stainless Steel -
Edelstahl


Balls -Kugeln :AISI 420 & Hardened -
Gehärtet AISI 420

Seals - Dichtungen :Nitrile seal NBR (Ni) -
Nitrilgummi
Dichtung NBR (Ni)

Plug - Nippel :Steel Hardened Oil
Burnished -
Stahl Gehärtet Brüniert

Option - Optionen (Material - Material)

B -Brass - Messing
CN- Steel & Chemical Nickel Plated
Stahl Chemisch Vernickelt
S - Stainless Steel - Edelstahl (S4-S6)

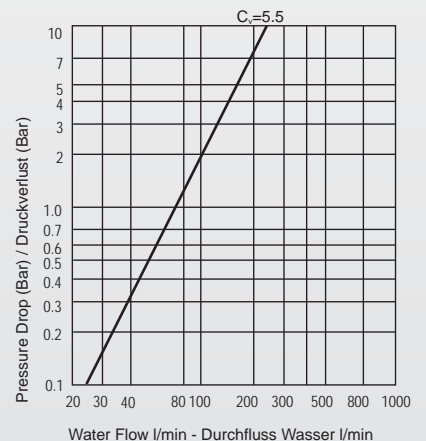

Male Threaded Coupler To ISO-228
Kupplung mit Aussengewinde zu ISO-228

BSP 3/4"	215.16 EGB 26	46	115.5	19	56
----------	---------------	----	-------	----	----

Male Threaded Coupler end 60°
Kupplung mit Außengewinde 60°

BSP 3/4"	215.16 EGB 26-60	46	113.5	17	56
M22x1.5	215.16 EGBM 22-60	46	108.5	12	56

Male Threaded Coupler end 24°
Kupplung mit Außengewinde 24°

M24x1.5-Ø16	215.16 EGBM 24-16	46	110.5	14	56
M30x2.0-Ø20	215.16 EGBM 30-20	46	112.5	16	56

Female Threaded Coupler ISO 228
Kupplung mit Innengewinde ISO 228

BSP 3/4"	215.16 DGB 26	46	110.5	19	56
----------	---------------	----	-------	----	----

Male Threaded Shut-Off Plug To ISO-228
Nippel mit Aussengewinde zu ISO-228

BSP 3/4"	215.16 EUB 26	46	115.5	19	56
----------	---------------	----	-------	----	----

Male Threaded Shut-off
Plug end Con. 60°
Nippel mit Außengewinde 60°

BSP 3/4"	215.16 EUB 26-60	46	113.5	17	56
M22x1.5	215.16 EUBM 22-60	46	108.5	12	56

Male Threaded Shut-off
Plug end Con. 24°
Nippel mit Außengewinde 24°

M24x1.5-Ø16	215.16 EUBM 24-16	46	110.5	14	56
M30x2.0-Ø20	215.16 EUBM 30-20	46	112.5	16	56

Female Threaded Shut-off Plug ISO 228
Nippel mit Innengewinde ISO 228

BSP 3/4"	215.16 DUB 26	36	72	19	42
----------	---------------	----	----	----	----

True Type Male Threaded
Plug to ISO 228
Nippel mit Außengewinde ISO 228

BSP 3/4"	215.16 EU 26	27	63	17	36
----------	--------------	----	----	----	----