



SERIE 215-20 ■

**PNEUMATIC, HYDRAULIC, HIGH PRESSURE
HYDRAULIC & GENERAL PURPOSE COUPLINGS**

PNEUMATIK, MITTELDRUCK-HYDRAULIK,
HOCHDRUCK-HYDRAULIK UND FLÜSSIGKEITEN.



HIGH PRESSURE SERIES HP
HOCHDRUCK SERIE HP

Interchangeability - Kompatibilität
WALTHER HP - 020

Temperature Range Temperaturbereich
-20°C +100°C (-4°F +212°F)

Working Pressure - Betriebsdruck
400 bar (5800 PSI) Steel - Stahl
180 bar (2610 PSI) 316L St. Steel - 316L Edelstahl


Flow capacity - Größen
NW - 16 mm (200 mm²)

For optional orders please add the symbol
of your option end of the order no.
Optionsbestellungen
Kennbuchstabe bitte hinzufügen
(Beispiel: 215.20 EGB 33-K-V)

Material - Material


- Coupler body - Kupplungsgrundkörper :Steel & Zinc Plated - Stahl Verzinkt
- Back Part - Rückwartiger :Steel Zinc Plated - Stahl Verzinkt
- Sleeve - Hülse :Steel Zinc Plated - Stahl Verzinkt
- Valve - Ventil :Brass - Messing
- Springs & Ring-Federn & Ring :Stainless Steel - Edelstahl
- Balls -Kugeln :AISI 420 & Hardened - Gehärtet AISI 420
- Seals - Dichtungen :Nitrile seal NBR (Ni) - Nitrilgummi
Dichtung NBR (Ni)
- Plug - Nippel :Steel Hardened Oil Burnished - Stahl Gehärtet Brüniert

Option - Optionen (Material - Material)
B -Brass - Messing
CN- Steel & Chemical Nickel Plated
Stahl Chemisch Vernickelt
S - Stainless Steel - Edelstahl (S4-S6)

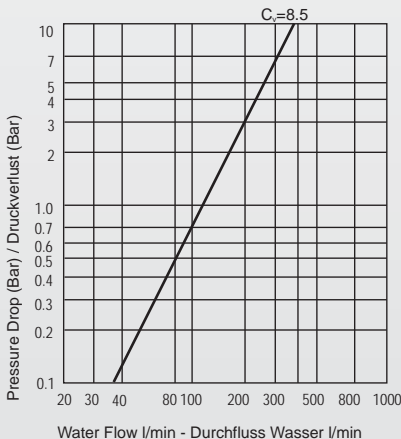


**Couplers and Plugs
Kupplungen und Nippel**

Connection Anschlüsse	Order No Bestellnr.	SW	L	LI	ØD
--------------------------	------------------------	----	---	----	----




Male Threaded Coupler To ISO-228
Kupplung mit Aussengewinde zu ISO-228

BSP 1"	215.20 EGB 33	55	119.5	21	62
--------	---------------	----	-------	----	----




Male Threaded Coupler end 60°
Kupplung mit Außengewinde 60°

BSP 1"	215.20 EGB 33-60	55	118.5	21	62
M26x1.5	215.20 EGBM 26-60	55	110.5	12	62
M30x1.5	215.20 EGBM 30-60	55	112.5	14	62




Male Threaded Coupler end 24°
Kupplung mit Außengewinde 24°

M30x2.0-Ø20	215.20 EGBM 30-20	55	114.5	16	62
M36x2.0-Ø25	215.20 EGBM 36-25	55	116.5	18	62




Female Threaded Coupler ISO 228
Kupplung mit Innengewinde ISO 228

BSP 1"	215.20 DGB 33	55	123	23	62
--------	---------------	----	-----	----	----




Male Threaded Shut-Off Plug To ISO-228
Nippel mit Aussengewinde zu ISO-228

BSP 1"	215.20 EUB 33	55	119.5	21	62
--------	---------------	----	-------	----	----




Male Threaded Shut-off
Plug end Con. 60°
Nippel mit Außengewinde 60°

BSP 1"	215.20 EUB 33-60	55	118.5	21	62
M26x1.5	215.20 EUBM 26-60	55	110.5	12	62
M30x1.5	215.20 EUBM 30-60	55	112.5	14	62




Male Threaded Shut-off
Plug end Con. 24°
Nippel mit Außengewinde 24°

M30x2.0-Ø20	215.20 EUBM 30-20	55	114.5	16	62
M36x2.0-Ø25	215.20 EUBM 36-25	55	116.5	18	62



Female Threaded Shut-off Plug ISO 228
Nippel mit Innengewinde ISO 228

BSP 1/2"	215.20 DUB 33	55	123	23	62
----------	---------------	----	-----	----	----



True Type Male Threaded Plug to ISO 228
Nippel mit Außengewinde ISO 228

BSP 1"	215.20 EU 33	41	74	21	45
--------	--------------	----	----	----	----