



SERIE **207-K** ■

**PNEUMATIC, HYDRAULIC, HIGH PRESSURE
HYDRAULIC & GENERAL PURPOSE COUPLINGS**

PNEUMATIK, MITTELDRUCK-HYDRAULIK,
HOCHDRUCK-HYDRAULIK UND FLÜSSIGKEITEN.



LOW PRESSURE CODED SERIES LP
NIEDERDRUCK CODE SERIE LP

Interchangeability - Kompatibilität
WALTHER UF - 007

Temperature Range Temperaturbereich
-20°C +100°C (-4°F +212°F)

Working Pressure - Betriebsdruck
0 - 25 bar (0 - 360 PSI) for Gases
0 - 40 bar (0 - 580 PSI) for Liquid

Flow capacity - Größen
NW - 6 (30 mm Sq)

For optional orders please add the symbol
of your option end of the order no.
Optionsbestellungen
Kennbuchstabe bitte hinzufügen
(Beispiel: 205 EGB 313-K-V)

Material - Material

Coupler body -
Kupplungsgrundkörper :Steel & Zinc Plated -
Stahl Verzinkt

Back Part -
Rückwärtiger :Steel Zinc Plated -
Stahl Verzinkt

Sleeve - Hülse :Steel Zinc Plated -
Stahl Verzinkt

Valve - Ventil :Brass - Messing
Springs & Ring-
Federn & Ring :Stainless Steel -
Edelstahl


Balls -Kugeln :AISI 420 & Hardened -
Gehärtet AISI 420

Seals - Dichtungen :Nitrile seal NBR (Ni) -
Nitrilgummi
Dichtung NBR (Ni)

Plug - Nippel :Brass Passivated -
Messing Passiviert


Option - Optionen (Material - Material)

S - Stainless Steel - Edelstahl
C -Steel - Stahl

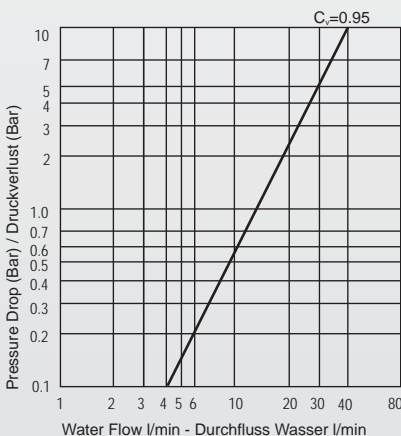


**Couplers and Plugs
Kupplungen und Nippel**

Connection Anschlüsse	Order No Bestellnr. ▲	Order No Bestellnr. ■	SW	Lenght Länge	ØD
--------------------------	--------------------------	--------------------------	----	-----------------	----




Male Threaded Coupler To ISO-228
Kupplung mit Aussengewinde zu ISO-228

BSP 1/4"	207 EGB 313	207 EGB 413	24	67	30
BSP 3/8"	207 EGB 317	207 EGB 417	24	68	30
BSP 1/2"	207 EGB 321	207 EGB 421	24	71	30



Female Threaded Coupler To ISO-228
Kupplung mit Innengewinde zu ISO-228


BSP 1/4"	207 DGB 313	207 DGB 413	24	68	30
BSP 3/8"	207 DGB 317	207 DGB 417	24	71	30
BSP 1/2"	207 DGB 321	207 DGB 421	27	71	30



Hose Tail Coupler
Kupplung mit Schlauchanschluß


Ø 6	207 HGB 306	207 HGB 406	24	81	30
Ø 9	207 HGB 309	207 HGB 409	24	86	30
Ø 11	207 HGB 311	207 HGB 411	24	86	30
Ø 13	207 HGB 313	207 HGB 413	24	86	30

■ **Self Sealing Plugs Verschlussnippel**




Male Threaded Shut-Off Plug To ISO-228
Nippel mit Aussengewinde zu
ISO-228 absperrend

BSP 1/4"	207 EUB 313	207 EUB 413	24	67	30
BSP 3/8"	207 EUB 317	207 EUB 417	24	67	30
BSP 1/2"	207 EUB 321	207 EUB 421	24	70	30



Female Threaded Shut-Off Plug To ISO-228
Nippel mit Innengewinde zu
ISO-228 absperrend


BSP 3/8"	207 DUB 317	207 DUB 417	24	67	30
BSP 1/2"	207 DUB 321	207 DUB 421	27	70	30



Hose Tail Shut-Off Plug
Nippel mit Schlauchtülle -absperrend


Ø 6	207 HUB 306	207 HUB 406	24	80	30
Ø 9	207 HUB 309	207 HUB 409	24	85	30
Ø 11	207 HUB 311	207 HUB 411	24	85	30
Ø 13	207 HUB 313	207 HUB 413	24	85	30

■ **Thru Flow Plugs Nippel Ohne Ventil**




Male Threaded Plug End Con. 60°
Nippel mit 60°
Konisches Aussengewinde

BSP 3/8"	207 EU 317	207 EU 417	19	41	21
BS 1/2"	207 EU 321	207 EU 421	22	44	24



Female Threaded Plug
Nippel mit Innengewinde

BSP 3/8"	207 DU 317	207 DU 417	22	43	24
BSP 1/2"	207 DU 321	207 DU 421	22	46	29.5



Hose Tail Plug
Nippel mit Schlauchanschluß

Ø 6	207 HU 306	207 HU 406		51	18
Ø 9	207 HU 309	207 HU 409		57	18
Ø 11	207 HU 311	207 HU 411		57	18
Ø 13	207 HU 313	207 HU 413		57	18