



# SERIE 215-10

**PNEUMATIC, HYDRAULIC, HIGH PRESSURE  
HYDRAULIC & GENERAL PURPOSE COUPLINGS**

PNEUMATIK, MITTELDRUCK-HYDRAULIK,  
HOCHDRUCK-HYDRAULIK UND FLÜSSIGKEITEN.



**HIGH PRESSURE SERIES HP**  
HOCHDRUCK SERIE HP

**Interchangeability - Kompatibilität**  
WALTHER HP - 010

**Temperature Range Temperaturbereich**  
-20°C +100°C (-4°F +212°F)

**Working Pressure - Betriebsdruck**  
600 bar (8700 PSI) Steel - Stahl  
300 bar (4350 PSI) 316L St. Steel - 316L Edelstahl


**Flow capacity - Größen**  
NW - 10 mm (80 mm<sup>2</sup>)

For optional orders please add the symbol  
of your option end of the order no.  
Optionsbestellungen  
Kennbuchstabe bitte hinzufügen  
(Beispiel: 215.10 EGB 21-K-V)

**Material - Material**


- Coupler body - Kupplungsgrundkörper :Steel & Zinc Plated - Stahl Verzinkt
- Back Part - Rückwärtiger :Steel Zinc Plated - Stahl Verzinkt
- Sleeve - Hülse :Steel Zinc Plated - Stahl Verzinkt
- Valve - Ventil :Brass - Messing
- Springs & Ring- Federn & Ring :Stainless Steel - Edelstahl
- Balls -Kugeln :AISI 420 & Hardened - Gehärtet AISI 420
- Seals - Dichtungen :Nitrile seal NBR (Ni) - Nitrilgummi  
Dichtung NBR (Ni)
- Plug - Nippel :Steel Hardened Oil Burnished - Stahl Gehärtet Brüniert

**Option - Optionen (Material - Material)**  
B -Brass - Messing  
CN- Steel & Chemical Nickel Plated  
Stahl Chemisch Vernickelt  
S - Stainless Steel - Edelstahl (S4-S6)

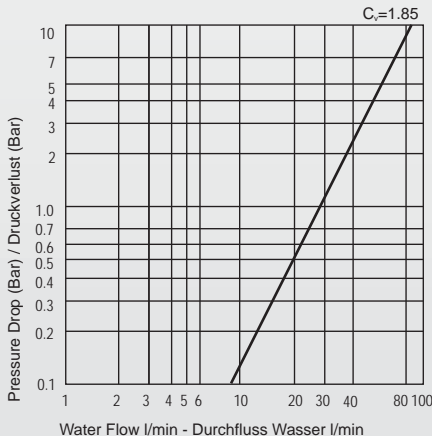


**Couplers and Plugs  
Kupplungen und Nippel**

Connection Anschlüsse	Order No Bestellnr.	SW	L	LI	ØD
--------------------------	------------------------	----	---	----	----




Male Threaded Coupler To ISO-228  
Kupplung mit Aussengewinde zu ISO-228

BSP 1/2"	215.10 EGB 21	41	97.5	17	46
----------	---------------	----	------	----	----




Male Threaded Coupler end 60°  
Kupplung mit Außengewinde 60°

BSP 1/2"	215.10 EGB 21-60	41	95.5	15	46
M18x1.5	215.10 EGBM 18-60	41	91.5	11	46
M22x1.5	215.10 EGBM 22-60	41	92.5	12	46




Male Threaded Coupler end 24°  
Kupplung mit Außengewinde 24°

M20x1.5-Ø12	215.10 EGBM 21-12	41	92.5	12	46
M22x1.5-Ø14	215.10 EGBM 22-14	41	94.5	14	46
M24x1.5-Ø16	215.10 EGBM 24-16	41	94.5	14	46




Female Threaded Coupler ISO 228  
Kupplung mit Innengewinde ISO 228

BSP 1/2"	215.10 DGB 21	41	96.5	17	46
NPT 1/2"	215.10 NGB 21	41	100.5	18	46




Male Threaded Shut-Off Plug To ISO-228  
Nippel mit Aussengewinde zu ISO-228

BSP 1/2"	215.10 EUB 21	30	80	14.5	34
----------	---------------	----	----	------	----




Male Threaded Shut-off Plug end Con. 60°  
Nippel mit Außengewinde 60°

BSP 1/2"	215.10 EUB 21-60	41	92.5	15	46
M18x1.5	215.10 EUBM 18-60	41	94.5	11	46
M22x1.5	215.10 EUBM 22-60	41	92.5	12	46




Male Threaded Shut-off Plug end Con. 24°  
Nippel mit Außengewinde 24°

M20x1.5-Ø12	215.10 EUBM 20-12	41	92.5	12	46
M22x1.5-Ø14	215.10 EUBM 22-14	41	94.5	14	46
M24x1.5-Ø16	215.10 EUBM 24-16	41	94.5	14	46



Female Threaded Shut-off Plug ISO 228  
Nippel mit Innengewinde ISO 228

BSP 1/2"	215.10 DUB 21	41	96.5	17	46
NPT 1/2"	215.10 NUB 21	41	100.5	18	46



True Type Male Threaded Plug to ISO 228  
Nippel mit Außengewinde ISO 228

BSP 1/2"	215.10 EU 21	27	63	17	30
----------	--------------	----	----	----	----