

PNEUMATIC COUPLINGS
PNEUMATISCHE KUPPLUNGEN

SERIE 022

SUPER FLOW **SUPERDURCHFLUSS**



Interchangeability - Kompatibilität
TST 014, RECTUS 14, ARO 210, PARKER 50
CEJN 300, ORION 44515, RECTUS 22,
AFNOR:NF.49.053, ISO 6150, JWL522, JWL532

Temperature Range - Temperaturbereich
-20°C +100°C (-4°F +212°F)

Working Pressure - Betriebsdruck
0 - 35 bar (0 - 508 PSI)

Flow capacity - Nennweite
NW - 5.5

Option - Optionen
F - Straight through flow -
ungehinderter Durchfluss
K - Chrome plated - verchromt
V - Viton Seal - Viton Dichtung

For optional orders please add the symbol of your
option end of the order no.
Bei Optionsbestellungen Kennbuchstabe
bitte hinzufügen (Beispiel: 022 EG 13-K-V)

Material - Material
Coupler Body -
Kupplungsgrundkörper : Steel Nickel Plated -
Stahl vernickelt

Back Part -
Rückwärtiger : Brass Nickel Plated -
Messing vernickelt

Sleeve - Hülse : Steel Nickel Plated -
Stahl vernickelt

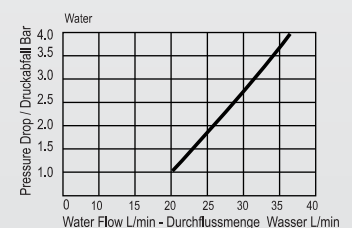

Valve - Ventil : Brass - Messing
Springs - Federn : Stainless Steel -
Edelstahl









Locking O-Ring-
Sprengring : Stainless Steel -
Edelstahl

Balls - Kugeln : Stainless Steel -
Edelstahl AISI 420

Seals - Dichtungen : Nitrile (Ni) - NBR (Ni)

Plug - Nippel : Steel Nickel Plated -
Stahl vernickelt



Couplers and Plugs Kupplungen und Nippel	Connection Anschlüsse	Order No Bestellnr.	SW	L	ØD
 Male Thread Coupling Kupplung mit Aussengewinde	BSPT 1/4"	022 RG 13	19	61	23
	BSPT 3/8"	022 RG 17	19	61	23
	BSPT 1/2"	022 RG 21	22	53	23
 Female Thread Coupling Kupplung mit Innengewinde	BSP 1/4"	022 DG 13	19	58	23
	BSP 3/8"	022 DG 17	19	58	23
	BSP 1/2"	022 DG 21	24	58	23
 Standard Hose Barb Coupling Kupplung mit Schlauchtülle	6 mm - 1/4"	022 HG 06	19	72	23
	8 mm - 5/16"	022 HG 08	19	72	23
	9 mm - 5/14"	022 HG 09	19	72	23
	10 mm - 3/8"	022 HG 10	19	72	23
	13 mm - 1/2"	022 HG 13	19	72	23
 Plastic Hose Coupling Kupplung für Kunststoffschlauch	6 x 8 mm M12x1	022 PG 06	19	61	23
	8 x 10 mm M16x1	022 PG 08	19	65	23
	9 x 12 mm M16x1	022 PG 09	19	65	23
 Plastic Hose Coupling With Spring Kupplung für Kunststoffschlauch mit Knickschutzfeder	6 x 8 mm M12x1	022 YG 06	19	128	23
	8 x 10 mm M16x1	022 YG 08	19	160	23
	9 x 12 mm M16x1	022 YG 09	19	160	23
 Standard Hose Barb Plug Nippel mit Schlauchtülle	6 mm - 1/4"	022 HU 06		47	
	8 mm - 5/16"	022 HU 08		47	
	10 mm - 3/8"	022 HU 10		47	
	13 mm - 1/2"	022 HU 13		47	
 Male Thread Plug Nippel mit Aussengewinde	BSPT 1/8"	022 RU 10	12	39	
	BSPT 1/4"	022 RU 13	14	41	
	BSPT 3/8"	022 RU 17	17	41	
	BSPT 1/2"	022 RU 21	22	47	
 Female Thread Plug Nippel mit Innengewinde	BSP 1/8"	022 DU 10	14	33	
	BSP 1/4"	022 DU 13	17	35	
	BSP 3/8"	022 DU 17	19	35	
	BSP 1/2"	022 DU 21	24	39	